

# GTX COMMUNITY

---

## Tables



GTXC-C42120-36

42"D x 120"W x 36"H

# GTX COMMUNITY



## GTX COMMUNITY TABLE

- 4 sets of 14-gauge powder coated steel leg frames bolt into a double steel keel assembly for a rigid base.
- 1-1/4" thick top "floats" on 3/4" spacers bolted through the steel frame assembly into the underside of the work surface.
- High-pressure laminate work surface.
- Legs fitted with adjustable leveling glides.
- Optional casters available.
- Edges are 3mm PVC.

### EDGE TYPES



**C**  
3mm  
PVC



**E\*\***  
3mm  
Wood



**S**  
1-1/2" Flip  
Wood

### CORNERS



Squared  
Corners

### CASTERS



\*\*Square and rectangle tops only.

## GTX COMMUNITY STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
GTXC-_4296-	42	96	36/42
GTXC-_42120-	42	120	36/42
GTXC-_4896-	48	96	36/42
GTXC-_48120-	48	120	36/42

## To Order, Choose Finish Selections & Options


**Work surface:** Choose your high pressure laminate and PVC edge band or wood veneer and wood edges.

**Frame:** Choose from our powder coat selection.

See **MTContracts'** Finish selections at <https://www.mtcontract.com/resources/finishes>

### POWER/CONNECTIVITY

- 2 power/2 active USB
- 1 open port
- 72" long cord
- Black or white finish

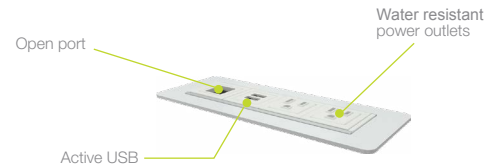

### General Specifications

**Table tops:** 1-1/4" thick, three-ply 45# particleboard construction with a .050" high-pressure laminate top surface and a .030" phenolic backer.

**Corners for rectilinear tops:** Square corners on banded tops have a 1/8" radius. Top floats on 3/4" spacers bolted through the steel frame assembly into the underside of the work surface.

**Leg and Frame Assembly:** 4 sets of 14-gauge powder coated steel leg frames bolt into a double steel keel assembly. Welded end frames consist of 1-1/2" square, 14 gauge steel tubing. End frames are connected to (2) 1-1/2" square steel tube spanners using 1/4-20 machine bolts. 3/4" diameter x 3/4"H spacers are placed between the top and the understructure. Frame assembly attaches to work surface using 1/4-20 machine bolts. Legs are fitted with adjustable leveling glides. Twin wheel locking casters are optional.



892 Industrial Park Drive  
Shelby, MI 49455  
P: 231.861.2194 | F: 231.861.6678  
[www.mtcontract.com](http://www.mtcontract.com)  
[sales@mediatechnologies.com](mailto:sales@mediatechnologies.com)

cs-gtxcommunitytable-181012

